



Peaceful Cabin Bay Window Cards

Stamp Set: Tidings & Trimmings, Peaceful Cabin

Ink: Basic Black

Paper: Smoky Slate, Basic Black, Basic White, Peaceful Place Designer Series Paper

Accessories: Simply Scored Scoring Tool, Stampin' Seal, Tear & Tape Adhesive, Mini Dimensionals, bone folder,

rhinestone jewels

You will need:

Card base measuring 4 1/4" x 11"


Score in half at $5 \frac{1}{2}$ ". Then, score at $5 \frac{7}{8}$ ", $7 \frac{3}{8}$ ", $9 \frac{1}{8}$ ", and $10 \frac{5}{8}$ ".

Panels cut from designer paper measuring 4 1/8" x 6"

Cut panels at ¼", 1 3/8", 1 5/8", 1 3/8", ¼", and 1 5/8".

Inside panel cut from card stock measuring 3 1/8" x 4" with matting measuring 3 ½" x 4 ¼"

Scrap of card stock for greeting and matting

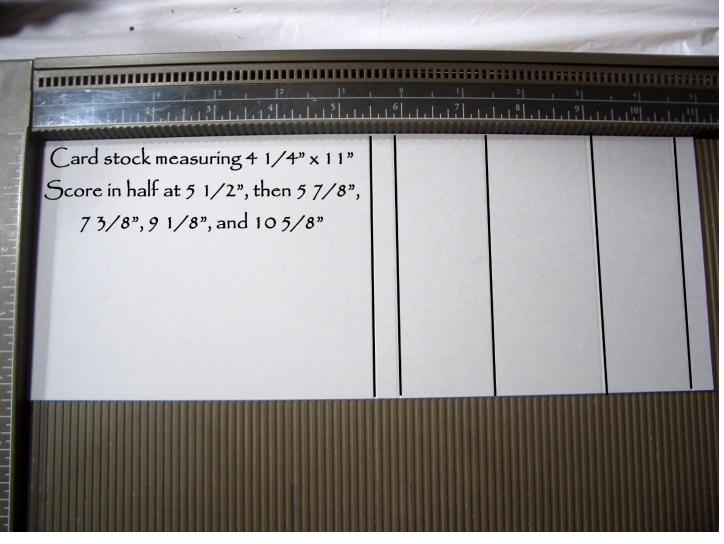

1. Cut Smoky Slate card stock measuring 4 $\frac{1}{2}$ " x 11". Score in half at 5 $\frac{1}{2}$ ", then 5 7/8", 7 3/8", 9 1/8", and 10 5/8".



2. Cut designer paper measuring 4 1/8" x6".

Anne Hayward, Independent Stampin' Up! Demonstrator, annehayward@stampingwithbluemooncreations.com



3. Cut designer paper into panels measuring $\frac{1}{4}$, 13/8", 15/8", 13/8", $\frac{1}{4}$, and 15/8".

If the pattern matters, keep the paper in the order in which it was cut.

If it helps, number the back of the panels 1-6.




4. Attach the 5 panels to the front of the card using Stampin' Seal or similar.



5. Attach the 6th panel on the inside of the card.

Anne Hayward, Independent Stampin' Up! Demonstrator, annehayward@stampingwithbluemooncreations.com

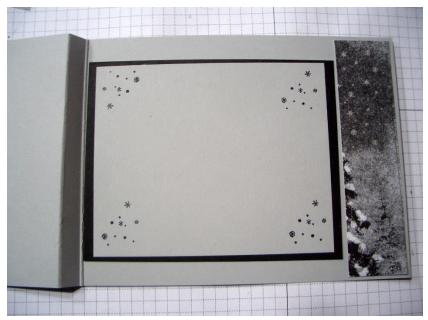

6. Stamp and mat inside panel and attach.

Inside panel cut from card stock measuring 3 1/8" x 4" with matting measuring 3 ½" x 4 ¼"

I stamped the stars from Peaceful Cabin on a piece of Smoky Slate card stock using Basic Black ink and attached to a Basic Black mat.



7. Now it's time to fold the card along the score lines.


First, fold the center score line.

Fold along the first ¼" score line. This should be a "valley" fold.


Fold along the next 2 score lines. These folds should be "mountain" folds.

The last ¼" score line is a "valley" fold. This piece will slip underneath the greeting on the right side to keep the bay window open.

Be sure to use a bone folder to get crisp score lines.

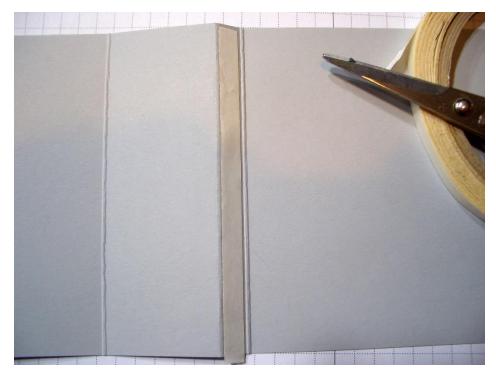


8. To secure the left side of the bay window, place a piece of Tear & Tape Adhesive or similar on the inside of the first ¼" score line.

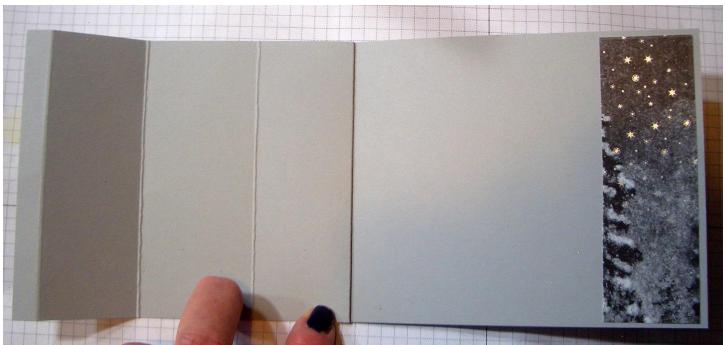

- 9. Remove the backing off the Tear & Tape Adhesive and fold the card in along the score line to secure.
- 10. Stamp greeting on a scrap piece of card stock and attach to a mat.

I used the greeting from Tidings & Trimmings stamped on a piece of Smoky Slate card stock using Basic Black ink and matted to a piece of Basic Black card stock.



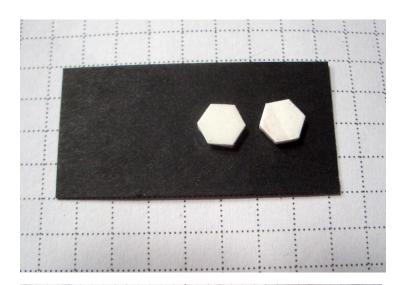

11. Attach 2 Mini Dimensionals on the left side of the back of the greeting.



12. Attach greeting on the inside, right side.

This will be the stopper to keep the bay window card open.

Attach a rhinestone jewel to complete.

